

Stainless steel air exhaust valve

KW-K-RM



Description

KW-K air exhaust valves can be installed in the ceiling, on the wall or directly in the mouth of a ventilation duct using a dedicated RM mounting frame. They allow smooth adjustment of the air exhaust flow rate by rotating the disk closure in the centre.

The air flow rate depends on the opening ratio, i.e. the distance between the disk closure distance and the round bezel, and it is set with a locknut.

The carefully designed geometry of the valve guarantees low noise level as well as quick and easy installation.

The standard air exhaust valves are supplied with a mounting frame (product code: KW-K-RM).

Available materials — Product code examples

KW-K-...- 1.4301/304 stainless steel sheet

Product code example

Product code: **KW-K-RM - aaa**

type _____
 Ød _____

Technical specifications

The following performance parameters:

volumetric flow rate, q (l/s or m^3/h), total pressure drop, P_t (Pa), and sound pressure level, L_A (dB(A)), for a specific disk closure depth can be read from the chart.

Pressure drop, P_t


The charts show the total pressure drop, P_t (Pa).

Sound pressure level, L_A

The charts show the sound pressure level, L_A (dB(A)).

The noise level is shown for the sound insulation level at 4 dB indoors, which corresponds to sound insulation performance in the reverberation zone at the room absorption level for 10 m^2 according to SABINE's formula.

Dimensions

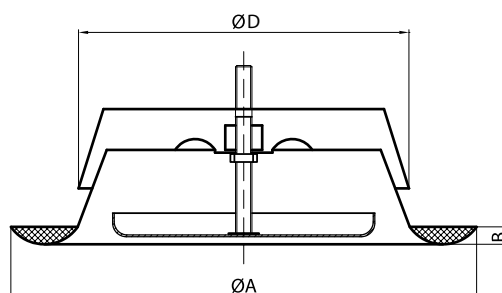

$\varnothing D_{nom}$ (mm)	$\varnothing A$ (mm)	B (mm)	Weight (kg)
80	115	12	0.15
100	137	12	0.19
125	164	12	0.31
150	202	12	0.35
160	212	12	0.47
200	248	12	0.66

Sound pressure level, L_A (dB(A))

Dimensions (mm)	Mean frequency (Hz)						
	125	250	500	1000	2000	4000	8000
80	-2	-6	-5	1	-1	-5	-14
100	4	3	2	0	-7	-15	-30
125	2	7	3	-2	-10	-20	-32
150	3	7	3	-2	-10	-20	-32
160	5	7	3	-2	-10	-19	-32
200	8	6	4	-3	-10	-19	-32
tolerance	3	2	2	2	2	2	3

Sound insulation level (dB)

Dimensions (mm)	Mean frequency (Hz)							
	63	125	250	500	1000	2000	4000	8000
80	26	18	14	10	8	8	6	9
100	22	16	11	8	6	6	3	6
125	20	15	9	6	4	3	3	5
150	19	15	9	6	4	3	4	5
160	18	13	8	5	4	4	5	6
200	17	11	7	6	6	5	6	6
tolerance	6	3	2	2	2	2	2	3

Stainless steel air exhaust valve

KW-RM, KWI, KW-K-RM

Technical specifications

Selection charts

